


1200Mbps Dual Band Gigabit In-Wall Access Point



CF-E538AC V2 Technical Specification	
Hardware Specifications	Chipset: MT7621DAT+MT7613B+MT7603E; DDR:128MB; Flash:16MB
Antenna	2*2dBi Internal Antennas
Wireless Standard	IEEE802.11b/g/n/ac;
RF Parameters	Output Power(Max): 200mW(23dBm); Receiving Sensitivity(Max): -96dBm; Working Frequency: 2.4GHz-2.472GHz 5.180GHz-5.825GHz
Modulation Mode	DSSS : DBPSK@1Mbps、QPSK@2Mbps、CCK@5.5/11Mbps OFDM : BPSK@6/9Mbps、QPSK@12/18Mbps、16-QAM@24Mbps、64-QAM@48/54Mbps 11n: MIMO-OFDM:BPSK, QPSK, 16QAM, 64QAM 11ac: MIMO-OFDM:BPSK, QPSK, 16QAM, 64QAM, 256QAM
Wireless Rate	2.4GHz: 300Mbps; 5.8GHz: 867Mbps
Physical Ports	1* 10/100/1000Mbps WAN Blue RJ45 Port; Support 48V POE; 1* 10/100/1000Mbps LAN Grey RJ45 Port
Indicator	WiFi Indicator, LED Light
Power Supply	Power Supply: 802.3af/802.3at POE Power Supply(0-100m); Power Adapter: 48V 0.32A PoE Power Adapter (available seperately)
Power Consumption	<12W
IP Index	IP41 rating
MTBF	>250000H
Installation Way	In Wall Installation
Case	Plastic Case (Imported ABS Material)
Physical Features	Size: 86*86*33mm
Working Environment	Working Temperature: -10°C~55°C; Storage Temperature: -40°C~70°C; Operation Humidity: 10%~90%RH Non-condensing ; Storage Humidity: 5%~90%RH Non-condensing

Wap G

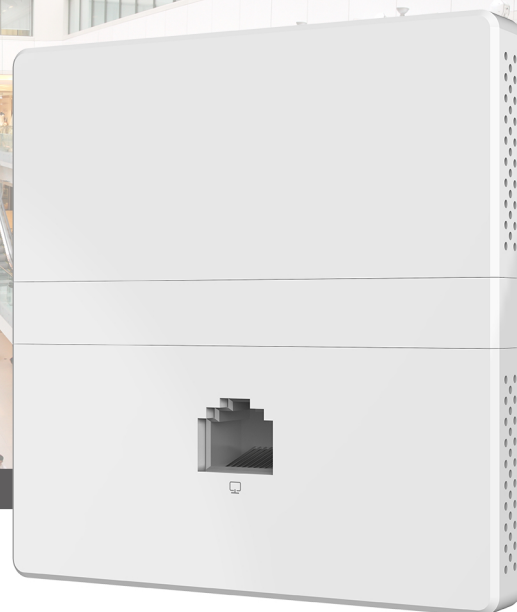

TECHNOLOGY... SINCE 1937

